

REACH IN FREEZER

D₂₈AF

Top Mounted / Solid Door



1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
Nema Config.
115V/60Hz
R290
Stainless Steel
Stainless Steel
O ~ -8°F
Compressor Power (HP)
3/4
Nema Config. NEMA5-15P

(%) (%) (%) (%) (%)

PRODUCT FEATURES

- Equipped with Locking Doors
- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey **(** 1-800-931-8628


(a) info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

D28AF

Front View

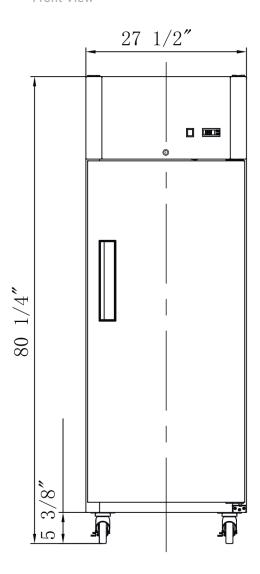

Side View



MODEL D28AF				
Rated Voltage	115V			
Rated Frequency	60Hz			
Total Input Power	750W			
Total Current	9.5A			
Total Capacity	18.31cu ft			
Climatic Category	4-5			
Protection Type	1			
Design Pressure High Side	300 PSIG			
Design Pressure Low Side	150 PSIG			
Insulation Blowing Gas	C-Pentane			
Refrigerant	R290/4.41 oz			

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D28AF	27 1/2 x 34 1/4 x 80 1/4	29 1/2 x 35 1/4 x 82 1/4	287 lbs	4	39















() 1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com