

Bottom Mounted / 2-Solid Door





### **TECHNICAL SPECIFICATIONS**

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel **Exterior Material Stainless Steel** Temperature Range °F 0 ~ -8°F Compressor Power (HP) 1-Nema Config. NEMA5-15P

## **PRODUCT FEATURES**

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ※ Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

(a) info@dukersusa.com


www.DukersUSA.com

# **DETAILS & SPECIFICATIONS**

### **D55F**

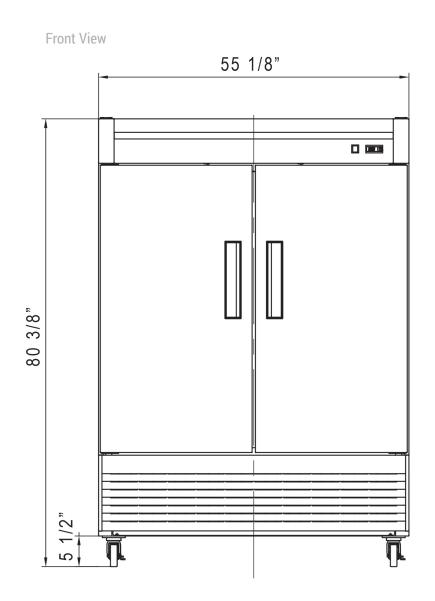

Side View

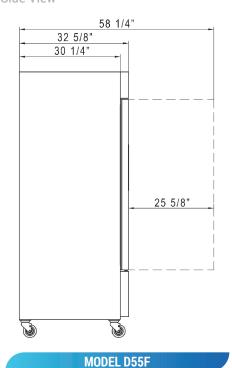

### Rated Voltage 115V Rated Frequency 60Hz 1250W **Total Input Power Total Current** 11.8 A **Total Capacity** 40.74 cu ft **Climatic Category** 4-5 **Protection Type 300 PSIG** Design Pressure High Side **Design Pressure Low Side 150 PSIG Insulation Blowing Gas** C-Pentane R290/5.11 oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D55F	55 1/8 x 32 5/8 x 80 3/8	57 1/8 x 34 5/8 x 82 3/8	463 lbs	8	21















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com www.DukersUSA.com