

## **BACK BAR COOLER**

MODEL DBB48-H2 Swinging Glass Door



## **TECHNICAL SPECIFICATIONS**

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Black Textured Finish Temperature Range °F 33 ~ 38°F Compressor Power (HP) 1/3

Nema Config. NEMA5-15P



### **PRODUCT FEATURES**

- Equipped with Locking Doors
- The side mount compressor structure is placed in an easy access area, provides quick and convenient
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- **B.B.** Precision digital temperature controls allow pinpoint accuracy with temperatures from 33-38°F.
- Stainless steel top, sealed interior floors, and rounded cabinet corners for easy cleaning.
- Adjustable, heavy-duty epoxy coated shelves.
- Constructed of commercial-grade body panels in **元**" black textured finish to fit all decors and living
- Featured in a large size and double pane tempered glass block UV light to safely keep all types of drinks ready to serve.
- LED interior lighting for bright product display.
  - Optional casters with breaks available upon request for better cleaning and mobility.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey





(a) info@dukersusa.com www.DukersUSA.com

# **DETAILS &**SPECIFICATIONS

### **BACK BAR COOLER**

#### Front View

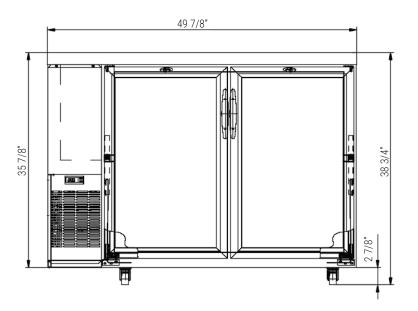



### **MODEL DBB48-H2**

Rated Voltage 115V Rated Frequency 60Hz **Total Input Power** 284W **Total Current** 2.66A **Total Capacity** 11.23 cu ft **Climatic Category** 4-5 **Protection Type** Design Pressure High Side **385 PSIG 150 PSIG Design Pressure Low Side** C-Pentane **Insulation Blowing Gas** R290/3.17 oz Refrigerant











MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40FT
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	(PCS)
DBB48-H2	49 7/8"x24 3/4"x38 3/4"	51 5/8"x26 3/8"x43 1/4"	198 lbs	4	54



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com

www.DukersUSA.com