



DUKERS
Quality Commercial Refrigeration



GLASS DOOR MERCHANDISER

DSM-19R

Single Glass Swing Door Refrigerator



i TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz
Refrigerant R290
Type of Defrost Automatic
Interior Finish White
Exterior Finish Black
Temperature Range °F 33 ~ 40°F
Compressor Power (HP) 1/3
Nema Config. NEMA5-15P



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Interior and canopy LED light with switch on the right side to always show your products at their best



High quality coated stainless adjustable shelves prevent peel and rust.



Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY & ROBUST DESIGN



DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com



www.DukersUSA.com

DETAILS & SPECIFICATIONS

DSM-19R

Front View

Side View

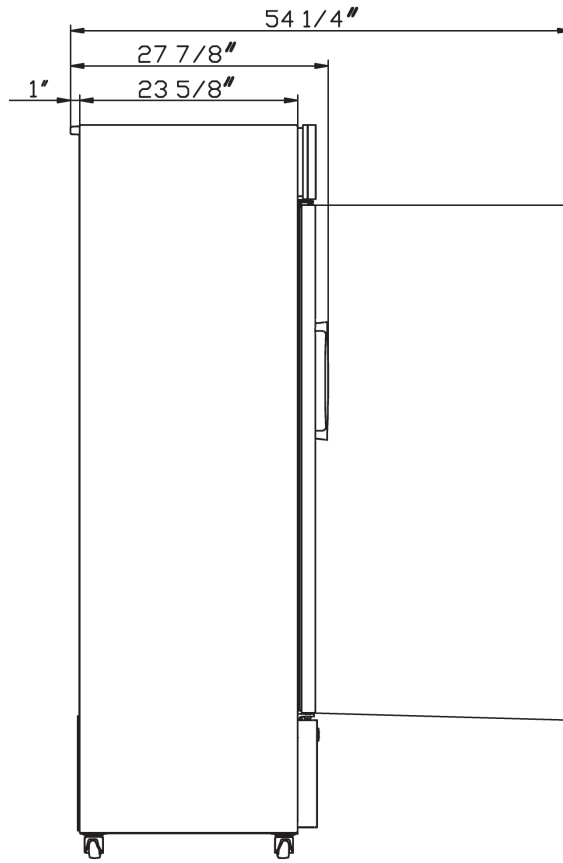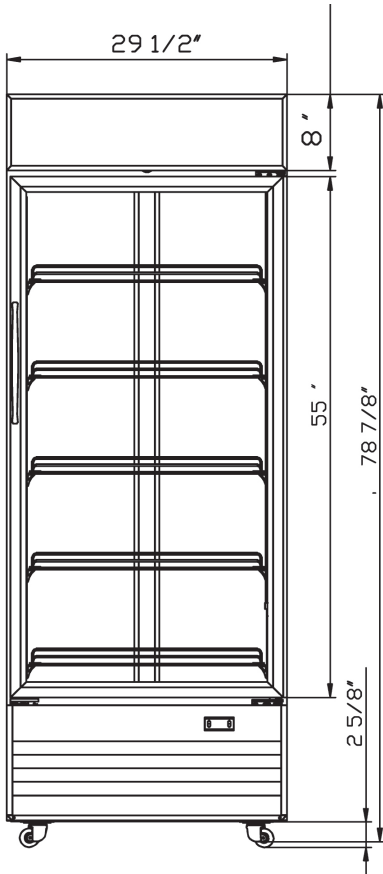

MODEL DSM-19R

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	356W
Total Current	3.2A
Total Capacity	18.72 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/3.70 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-19R	29 1/2 x 27 7/8 x 78 7/8	31 1/2 x 28 7/8 x 80 7/8	266 lbs	5	45



AutoQuotes



115/60/1
NEMA-5-15P



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com