

UNDERCOUNTER FREEZER

MODEL DUC60F

2-Door







Voltage/Frequency 115V/60Hz Temperature Range °F 0 ~ -8°F Compressor Power (HP) 1/2-

Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel **Exterior Material Stainless Steel**

Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ★ Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- T 6" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com

www.DukersUSA.com

DETAILS & SPECIFICATIONS

UNDERCOUNTER DUC60F

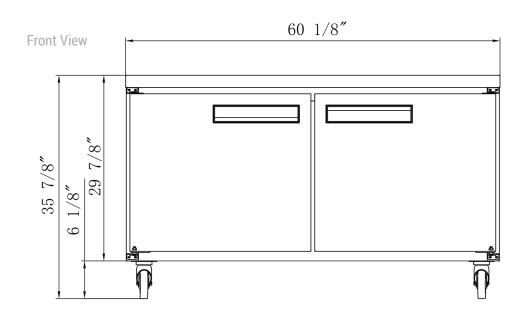

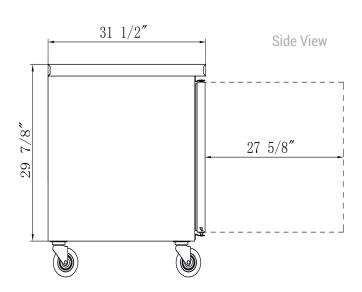

MODEL DUC60F

115V Rated Voltage Rated Frequency 60Hz 950W **Total Input Power** 8.0A **Total Current Total Capacity** 15.53 cu ft 4-5 **Climatic Category Protection Type** Design Pressure High Side **300 PSIG 150 PSIG Design Pressure Low Side C-Pentane Insulation Blowing Gas** R290/4.76oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	_	40HQ CONTAINER CERT.
DUC60F	60 1/8 x 31 1/2 x 36	61 5/8 x 33 1/8 x 39 3/8	231 lbs	2	30









AQ AutoQuotes









() 1-800-931-8628