

## **REACH IN FREEZER**

D55AF

Top Mounted / 2-Solid Door



#### TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 0 ~ -8°F Compressor Power (HP) 1-Nema Config. NEMA5-15P

#### **PRODUCT FEATURES**

- Equipped with Locking Doors
- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- [8.8] Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- \* Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com


www.DukersUSA.com

# **DETAILS & SPECIFICATIONS**

### D55AF



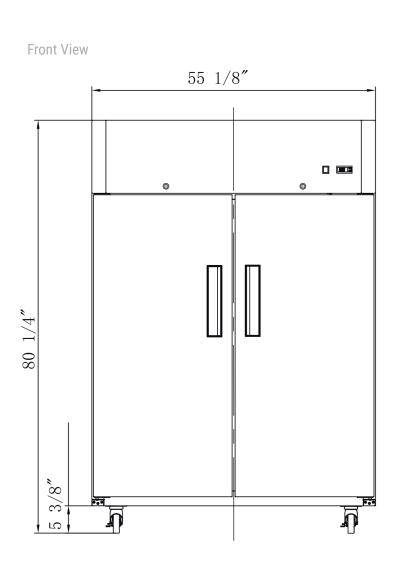

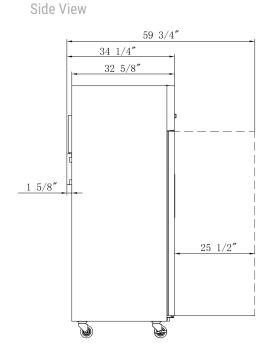

MODEL D55AF				
Rated Voltage	115V			
Rated Frequency	60Hz			
Total Input Power	1250W			
Total Current	11.8 A			
Total Capacity	41.73 cu ft			
Climatic Category	4-5			
Protection Type	I			
Design Pressure High Side	300 PSIG			
Design Pressure Low Side	150 PSIG			
Insulation Blowing Gas	C-Pentane			
Refrigerant	R290/5.11 oz			

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D55AF	55 1/8 x 34 1/4 x 80 1/4	57 1/8 x 35 1/4 x 82 1/4	463 lbs	8	16















